


Cartridge

7mm Rem SA Ultra Mag - 175 grain

Version 9.0

NOSLER®

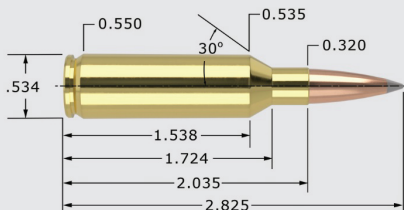

7mm Rem SA Ultra Mag - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	175gr. Spitzer	2.800"	0.648	0.310
Partition®	PT	175gr. Spitzer	2.800"	0.519	0.310
CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2M		
CASE HOLDS:	61.7 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-9 1/2"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4350	52.0 * MAX.	2712	90%		
	50.0	2628	87%		
	48.0	2544	83%		
Hunter	55.5 MAX.	2735	93%		
	Most Accurate 53.5 *	2644	89%		
	Powder Tested 51.5	2553	86%		
IMR 4955	59.5 * MAX.	2753	**	103%	
	57.5	2643		99%	
	55.5	2533		96%	
Magnum	65.0 MAX.	2832	**	107%	
	63.0	2777	**	104%	
	61.0 *	2723		100%	
H1000	61.5 MAX.	2836	**	105%	
	59.5 *	2750	**	102%	
	57.5	2664		99%	
RL25	63.5 MAX.	2875	**	112%	
	61.5 *	2797	**	108%	
	59.5	2720	**	105%	
MAGPRO	64.0 * MAX.	2876	**	107%	
	62.0	2778	**	104%	
	60.0	2680		100%	
Returnbo	63.5 MAX.	2879	**	111%	
	61.5	2796	**	107%	
	59.5 *	2712	**	104%	
RL22	59.0 MAX.	2882	**	104%	
	57.0 *	2790		100%	
	55.0	2699		97%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load