


# Cartridge

## 7mm Rem SA Ultra Mag - 185 grain

Version 9.0

# NOSLER®

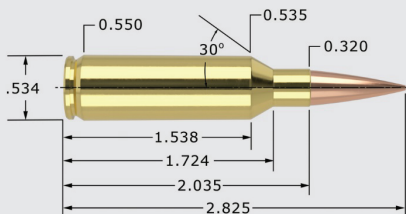

## 7mm Rem SA Ultra Mag - 185 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™		RDF	185gr. HPBT	2.825"	0.719 0.328
CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	62.5	Gr. WATER	BARREL Length/Make	24" Wiseman	
			BARREL Twist	1-9 1/4"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.		LOAD DENSITY (VOLUME)
<b>RL23</b>	54.5 * MAX.	2717			97%
	52.5	2632			93%
	50.5	2547			90%
<b>IMR 4350</b> Most Accurate Powder Tested	54.5 MAX.	2733			93%
	52.5 *	2636			90%
	50.5	2539			86%
<b>RL22</b>	55.0 MAX.	2734			96%
	53.0 *	2643			92%
	51.0	2552			89%
<b>H1000</b>	59.0 * MAX.	2741			100%
	57.0	2662			97%
	55.0	2583			93%
<b>MAGPRO</b>	61.0 * MAX.	2775		**	101%
	59.0	2689			97%
	57.0	2603			94%
<b>Norma MRP</b>	58.0 MAX.	2792		**	102%
	56.0 *	2699			98%
	54.0	2606			95%
<b>RL19</b>	58.0 * MAX.	2796		**	101%
	56.0	2708			97%
	54.0	2620			94%
<b>Magnum</b>	64.5 MAX.	2799		**	105%
	62.5	2725		**	102%
	60.5 *	2650			98%
<b>RL26</b>	58.0 MAX.	2800			95%
	56.0 *	2700			91%
	54.0	2601			88%
<b>RL25</b>	62.0 MAX.	2801		**	108%
	60.0 *	2728		**	104%
	58.0	2654		**	101%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested

\*\* = Compressed load