


Cartridge

7mm STW - 140 grain

Version 9.1

NOSLER®

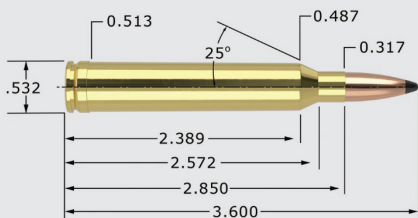

7mm STW - 140 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	140gr. Spitzer	3.600"	0.485 0.248
Ballistic Tip®	BT	140gr. Spitzer	3.600"	0.485 0.248
CT® Ballistic Silvertip®	BST	140gr. Spitzer	3.600"	0.485 0.248
Expansion Tip®	ET	140gr. Spitzer	3.570"	0.489 0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	PT	140gr. Spitzer	3.600"	0.434 0.248

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	91.3 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N160	70.0 MAX. 3213	[Bar]	85%
	68.0 3145	[Bar]	83%
	66.0 * 3077	[Bar]	80%
IMR 4350	71.5 * MAX. 3299	[Bar]	84%
	69.5 3215	[Bar]	81%
	67.5 3130	[Bar]	79%
IMR 4831	73.0 * MAX. 3319	[Bar]	86%
	71.0 3224	[Bar]	83%
	69.0 3130	[Bar]	81%
H4831	74.5 MAX. 3319	[Bar]	85%
	Most Accurate 72.5 3258	[Bar]	83%
	Powder Tested 70.5 * 3198	[Bar]	80%
IMR 7828	77.5 MAX. 3355	[Bar]	90%
	75.5 3255	[Bar]	88%
	73.5 * 3156	[Bar]	86%
RL19	75.0 MAX. 3362	[Bar]	89%
	73.0 3277	[Bar]	87%
	71.0 * 3192	[Bar]	85%
RL22	76.5 MAX. 3400	[Bar]	91%
	74.5 3309	[Bar]	89%
	72.5 * 3218	[Bar]	86%
RL25	81.0 MAX. 3437	[Bar]	96%
	79.0 * 3350	[Bar]	94%
	77.0 3263	[Bar]	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load