


Cartridge

7mm STW - 150 grain

Version 9.0

NOSLER®

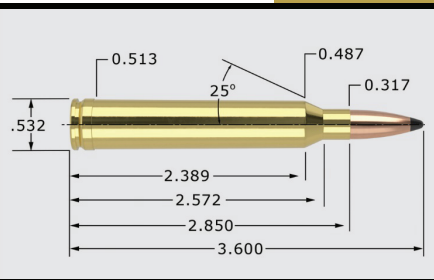

7mm STW - 150 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	3.600"	0.493	0.266
AccuBond® Long Range	ABLR	150gr. Spitzer	3.600"	0.546	0.266
Ballistic Tip®	BT	150gr. Spitzer	3.600"	0.493	0.266
CT® Ballistic Silvertip®	BST	150gr. Spitzer	3.600"	0.493	0.266
Expansion Tip®	ET	150gr. Spitzer	3.570"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	3.600"	0.456	0.266

CASE TYPE:	Nosler		PRIMER TYPE	Fed 215
CASE HOLDS:	90.1	Gr. WATER	BARREL Length/Make	24" H-S Prec.
			BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N165	79.0	MAX. 3156		97%
	77.0	3123		95%
	75.0 *	3091		92%
H4831SC	79.5 *	MAX. 3193		92%
	77.5	3067		90%
	75.5	2941		87%
IMR 7828 SSC	77.5	MAX. 3210		89%
	75.5 *	3120		86%
	73.5	3031		84%
H1000 Most Accurate Powder Tested	82.0 *	MAX. 3213		96%
	80.0	3129		94%
	78.0	3045		92%
RL19	73.0 *	MAX. 3215		88%
	71.0	3125		86%
	69.0	3035		83%
Magnum	85.0 *	MAX. 3217		96%
	83.0	3154		94%
	81.0	3091		91%
Retumbo	83.5	MAX. 3219		100%
	81.5 *	3128		97%
	79.5	3037		95%
RL22	74.0 *	MAX. 3219		89%
	72.0	3134		87%
	70.0	3049		84%
Norma MRP	76.5 *	MAX. 3234		93%
	74.5	3142		91%
	72.5	3049		88%
RL25	80.0 *	MAX. 3332		97%
	78.0	3253		94%
	76.0	3175		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load