


Cartridge

7mm STW - 160 grain

Version 9.0

NOSLER®

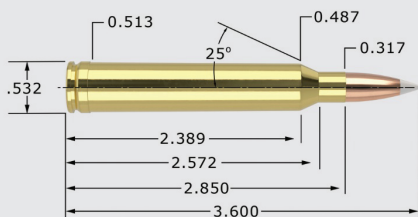

7mm STW - 160 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 160gr. Spitzer	3.600"	0.531	0.283
Partition®	PT 160gr. Spitzer	3.600"	0.475	0.283

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	90.6 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
N165	71.0 MAX. 3006		87%
	69.0 2947		85%
	67.0 * 2888		82%
H4831	69.5 MAX. 3013		80%
	67.5 2954		78%
	65.5 * 2895		75%
IMR 4350	68.0 MAX. 3074		80%
	66.0 3001		78%
	64.0 * 2929		76%
H1000 Most Accurate Powder Tested	78.0 MAX. 3080		91%
	76.0 2997		89%
	74.0 * 2915		86%
RL22	73.0 MAX. 3121		88%
	71.0 3035		85%
	69.0 * 2950		83%
IMR 7828	75.0 MAX. 3123		88%
	73.0 3026		86%
	71.0 * 2929		83%
RL19	70.5 MAX. 3144		85%
	68.5 3081		82%
	66.5 * 3018		80%
Magnum	84.0 * MAX. 3228		94%
	82.0 3173		92%
	80.0 3117		90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load