


# Cartridge

## 7mm STW - 168 grain

Version 9.0

# NOSLER®

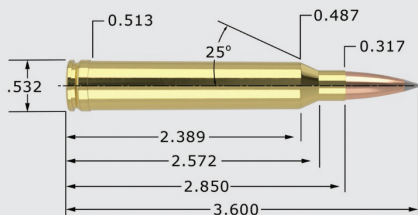

## 7mm STW - 168 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.	3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	<b>ABLR</b> 168gr. Spitzer	3.600"	0.616	0.298
Custom Competition®	<b>CC</b> 168gr. HPBT	3.580"	0.520	0.298

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215	
CASE HOLDS:	88.7 Gr. WATER	BARREL Length/Make	24" H-S Prec.	
		BARREL Twist	1-9"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL22</b>	73.5 MAX. 3052		90%
	71.5 * 2957		88%
	69.5 2862		85%
<b>H4831SC</b>	77.0 * MAX. 3063		90%
	75.0 2965		88%
	73.0 2867		86%
<b>N165</b>	76.5 MAX. 3077		96%
	74.5 2992		93%
	72.5 * 2908		91%
<b>H1000</b>	80.0 MAX. 3093		95%
	Most Accurate Powder Tested 78.0 * 3022		93%
	76.0 2951		91%
<b>Norma MRP</b>	74.0 MAX. 3094		92%
	72.0 * 3005		89%
	70.0 2916		87%
<b>Magnum</b>	83.0 * MAX. 3096		95%
	81.0 3035		93%
	79.0 2974		90%
<b>IMR 7828 SSC</b>	76.5 * MAX. 3115		89%
	74.5 3041		87%
	72.5 2966		84%
<b>Retumbo</b>	82.5 MAX. 3144		100%
	80.5 * 3055		98%
	78.5 2966		95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary  
 \* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.  
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested  
 \*\* = Compressed load