


Cartridge

7mm STW - 175 grain

Version 9.0

NOSLER®

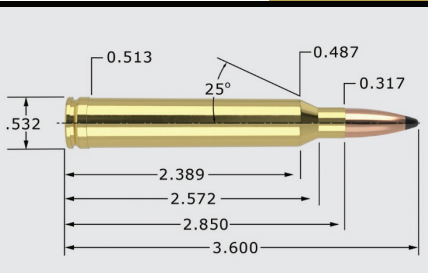

7mm STW - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	175gr. Spitzer	3.600"	0.648	0.310
Partition®	PT	175gr. Spitzer	3.600"	0.519	0.310
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215		
CASE HOLDS:	88.0 Gr. WATER	BARREL Length/Make	24" H-S Prec.		
		BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
N165 Most Accurate Powder Tested	71.0 MAX. 2802		90%		
	69.0 * 2726		87%		
	67.0 2649		85%		
RL22	71.0 MAX. 2894		88%		
	69.0 * 2832		85%		
	67.0 2771		83%		
H4831SC	75.5 * MAX. 2975		89%		
	73.5 2908		87%		
	71.5 2842		85%		
Norma MRP	72.0 MAX. 2986		90%		
	70.0 2900		87%		
	68.0 * 2815		85%		
H1000	78.0 MAX. 2999		94%		
	76.0 2938		91%		
	74.0 * 2877		89%		
MAGPRO	79.0 * MAX. 3019		93%		
	77.0 2953		90%		
	75.0 2888		88%		
Retumbo	80.0 MAX. 3026		98%		
	78.0 2948		95%		
	76.0 * 2870		93%		
IMR 7828 SSC	75.0 MAX. 3026		88%		
	73.0 * 2950		86%		
	71.0 2875		83%		
Magnum	82.0 MAX. 3052		95%		
	80.0 * 2977		92%		
	78.0 2902		90%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load