


Cartridge

7mm STW - 185 grain

Version 9.0

NOSLER®

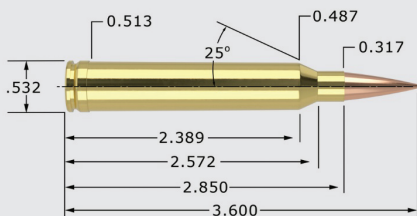

7mm STW - 185 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.600"	TESTED O.A.C.L.	B.C.	S.D.
Reduced Drag Factor™		RDF	185gr. HPBT	3.600"	0.719 0.328
CASE TYPE:	Nosler		PRIMER TYPE		WLRM
CASE HOLDS:	86.3	Gr. WATER	BARREL Length/Make		24" H-S Prec.
			BARREL Twist		1-9 1/2"
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
N165	72.0	MAX. 2820	<div style="width: 93%;"></div>	93%	
	70.0 *	2728	<div style="width: 90%;"></div>	90%	
	68.0	2636	<div style="width: 88%;"></div>	88%	
RL23 Most Accurate Powder Tested	69.5	MAX. 2846	<div style="width: 89%;"></div>	89%	
	67.5 *	2775	<div style="width: 87%;"></div>	87%	
	65.5	2704	<div style="width: 84%;"></div>	84%	
H1000	75.0	MAX. 2892	<div style="width: 92%;"></div>	92%	
	73.0 *	2809	<div style="width: 90%;"></div>	90%	
	71.0	2726	<div style="width: 87%;"></div>	87%	
RL26	72.5	MAX. 2901	<div style="width: 86%;"></div>	86%	
	70.5 *	2820	<div style="width: 83%;"></div>	83%	
	68.5	2739	<div style="width: 81%;"></div>	81%	
MAGPRO	76.0	MAX. 2917	<div style="width: 91%;"></div>	91%	
	74.0	2838	<div style="width: 88%;"></div>	88%	
	72.0 *	2759	<div style="width: 86%;"></div>	86%	
Magnum	79.0	MAX. 2917	<div style="width: 93%;"></div>	93%	
	77.0	2861	<div style="width: 91%;"></div>	91%	
	75.0 *	2805	<div style="width: 88%;"></div>	88%	
Retumbo	78.0 *	MAX. 2927	<div style="width: 97%;"></div>	97%	
	76.0	2840	<div style="width: 95%;"></div>	95%	
	74.0	2753	<div style="width: 92%;"></div>	92%	
Norma 217	78.5	MAX. 2950	<div style="width: 102%;"></div>	**	102%
	76.5 *	2873	<div style="width: 100%;"></div>		100%
	74.5	2796	<div style="width: 97%;"></div>		97%
LRT	88.0	MAX. 2984	<div style="width: 101%;"></div>	**	101%
	86.0	2919	<div style="width: 99%;"></div>		99%
	84.0 *	2853	<div style="width: 97%;"></div>		97%
US869	87.5	MAX. 3016	<div style="width: 104%;"></div>	**	104%
	85.5 *	2938	<div style="width: 102%;"></div>	**	102%
	83.5	2860	<div style="width: 99%;"></div>		99%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load