


# Cartridge

## 7mm WSM - 140 grain

Version 9.0

# NOSLER®

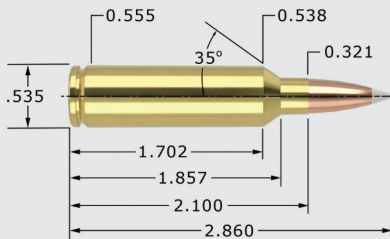

## 7mm WSM - 140 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.860"		B.C.	S.D.
AccuBond®	<b>AB</b>	140gr. Spitzer	2.850"	0.485	0.248
Ballistic Tip®	<b>BT</b>	140gr. Spitzer	2.850"	0.485	0.248
CT® Ballistic Silvertip®	<b>BST</b>	140gr. Spitzer	2.850"	0.485	0.248
Expansion Tip®	<b>ET</b>	140gr. Spitzer	2.820"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	140gr. Spitzer	2.850"	0.434	0.248

CASE TYPE:	Winchester	PRIMER TYPE	WLRM
CASE HOLDS:	74.5 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9 1/2"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>RL15</b>	54.5 MAX.	3089	76%
	52.5	3017	73%
	50.5 *	2945	71%
<b>Varget</b>	55.0 MAX.	3110	80%
	53.0 *	3011	77%
	51.0	2912	74%
<b>H414</b>	62.0 MAX.	3124	87%
	60.0 *	3034	84%
	58.0	2944	81%
<b>Hunter</b>	66.0 MAX.	3138	91%
	64.0 *	3054	89%
	62.0	2970	86%
<b>IMR 4350</b>	64.0 * MAX.	3193	92%
Most Accurate	62.0	3095	89%
Powder Tested	60.0	2997	86%
<b>H4831SC</b>	67.5 MAX.	3221	94%
	65.5 *	3147	92%
	63.5	3074	89%
<b>IMR 4831</b>	65.5 * MAX.	3228	94%
	63.5	3134	91%
	61.5	3041	88%
<b>N560</b>	67.5 * MAX.	3261	** 101%
	65.5	3155	98%
	63.5	3049	95%
<b>RL19</b>	68.5 MAX.	3297	100%
	66.5	3207	97%
	64.5 *	3117	94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load