


Cartridge

7mm WSM - 150 grain

Version 9.0

NOSLER®

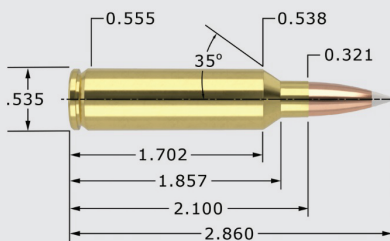

7mm WSM - 150 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	150gr. Spitzer	2.850"	0.493	0.266
AccuBond® Long Range	ABLR	150gr. Spitzer	2.850"	0.546	0.266
Ballistic Tip®	BT	150gr. Spitzer	2.850"	0.493	0.266
CT® Ballistic Silvertip®	BST	150gr. Spitzer	2.850"	0.493	0.266
Expansion Tip®	ET	150gr. Spitzer	2.820"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	PT	150gr. Spitzer	2.850"	0.456	0.266

CASE TYPE:	Winchester	PRIMER TYPE	WLRM
CASE HOLDS:	73.5 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9 1/2"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Varget	52.0 MAX. 2944		76%
	50.0 * 2840		74%
	48.0 2737		71%
H4831SC	65.0 MAX. 3037		92%
	63.0 * 2968		89%
	61.0 2898		86%
IMR 4350	60.5 MAX. 3047		88%
	58.5 2966		85%
	56.5 * 2885		82%
H414	61.0 * MAX. 3063		86%
	59.0 2980		84%
	57.0 2897		81%
Hunter	65.5 MAX. 3065		92%
	63.5 2977		89%
	61.5 * 2889		86%
IMR 4831	62.5 MAX. 3075		91%
	60.5 3002		88%
	58.5 * 2929		85%
N560	64.0 MAX. 3102		97%
	62.0 * 3011		94%
	60.0 2919		91%
RL19	64.5 MAX. 3129		95%
	62.5 3044		92%
	60.5 * 2959		89%
MAGPRO	73.0 MAX. 3134		** 102%
Most Accurate Powder Tested	71.0 * 3092		100%
	69.0 3050		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load