


Cartridge

7mm WSM - 160 grain

Version 9.0

NOSLER®

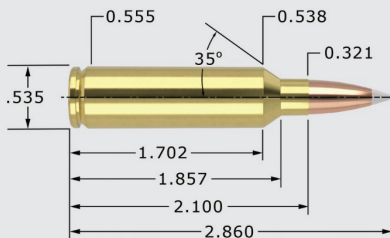

7mm WSM - 160 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	160gr. Spitzer	2.850"	0.531	0.283
Partition®	PT	160gr. Spitzer	2.850"	0.475	0.283
CASE TYPE:	Winchester		PRIMER TYPE	WLRM	
CASE HOLDS:	74.3	Gr. WATER	BARREL Length/Make	24" Wiseman	
			BARREL Twist	1-9 1/2"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
Varget	49.0	MAX. 2743		71%	
	47.0 *	2652		68%	
	45.0	2561		65%	
H4831SC	61.5	MAX. 2881		86%	
	59.5	2795		83%	
	57.5 *	2710		81%	
IMR 4350	57.5 *	MAX. 2894		83%	
	55.5	2812		80%	
	53.5	2730		77%	
IMR 7828	67.0	MAX. 2913		96%	
	65.0	2823		93%	
	63.0 *	2733		90%	
IMR 4831	58.5 *	MAX. 2917		84%	
Most Accurate	56.5	2835		81%	
Powder Tested	54.5	2754		78%	
H414	57.0	MAX. 2921		80%	
	55.0 *	2818		77%	
	53.0	2715		74%	
N560	59.5	MAX. 2925		89%	
	57.5 *	2843		86%	
	55.5	2760		83%	
Hunter	63.5	MAX. 2949		88%	
	61.5	2875		85%	
	59.5 *	2802		83%	
MAGPRO	70.0	MAX. 3063		97%	
	68.0	2976		94%	
	66.0 *	2890		92%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load