


Cartridge

7mm WSM - 168 grain

Version 9.0

NOSLER®

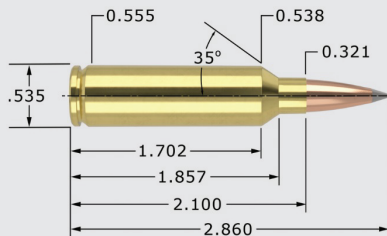

7mm WSM - 168 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.	2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR 168gr. Spitzer	2.825"	0.616	0.298
Custom Competition®	CC 168gr. HPBT	2.825"	0.520	0.298

CASE TYPE:	Winchester	PRIMER TYPE	WLRM
CASE HOLDS:	72.5 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9 1/2"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Hybrid 100V	60.0 MAX. 2949		85%
Most Accurate	58.0 2864		82%
Powder Tested	56.0 * 2778		80%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load