


# Cartridge

7mm WSM - 175 grain

Version 9.0

# NOSLER®

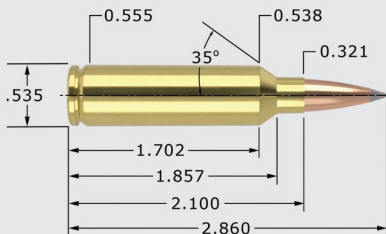

7mm WSM - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond® Long Range	<b>ABLR</b>	175gr. Spitzer	2.850"	0.648	0.310	
Partition®	<b>PT</b>	175gr. Spitzer	2.850"	0.519	0.310	
CASE TYPE:	Winchester		PRIMER TYPE	WLRM		
CASE HOLDS:	72.1	Gr. WATER	BARREL Length/Make	24" Wiseman		
			BARREL Twist	1-9 1/2"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
<b>Varget</b>	47.0	MAX. 2621	70%			
	45.0	2525	67%			
	43.0 *	2429	64%			
<b>H414</b>	54.0	MAX. 2768	78%			
	52.0 *	2676	75%			
	50.0	2584	72%			
<b>Hunter</b>	62.0	MAX. 2778	89%			
	60.0	2722	86%			
	58.0 *	2666	83%			
<b>IMR 4350</b>	56.5	MAX. 2804	84%			
	54.5	2718	81%			
	52.5 *	2631	78%			
<b>IMR 4831</b>	56.5	MAX. 2816	84%			
	54.5	2735	81%			
	52.5 *	2655	78%			
<b>H4831SC</b>	60.0	MAX. 2819	87%			
	58.0 *	2741	84%			
	56.0	2664	81%			
<b>IMR 7828</b>	66.5	MAX. 2844	98%			
	64.5 *	2743	95%			
	62.5	2643	92%			
<b>N560</b>	58.5	MAX. 2862	90%			
	Most Accurate	56.5	2774	87%		
	Powder Tested	54.5 *	2687	84%		
<b>MAGPRO</b>	71.5 *	MAX. 2955	**	102%		
	69.5	2905		99%		
	67.5	2855		97%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load