
Cartridge

7mm Wby Mag - 120 grain

Version 9.0

105% 103%



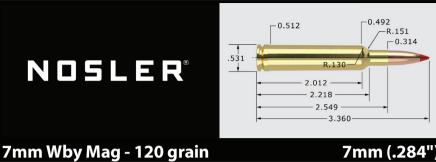

MAXIMUM S	AAMI	O.A.C.L		3.360"	TESTED O.A.C.L.	В	.C.	S.D.
Ballistic Tip®			BT	120gr. Spitzer	3.360"	0	.417	0.213
CASE TYPE:	: Norma			PRIMER TYPE			Rem 9 1/2M	
CASE HOLDS:	85.0 Gr. WATER		BARREL Length/Make			24" Lilja		
				BARREL Twist			1-9"	
POWDER			MUZZLE VEL.			LOAD DENSITY		
TYPE	GRS.			F.P.S.	_		(VOLU	IME)
N165	77.0	MAX.	3422			××		01%
	75.0		3318				9	98%
	73.0	*	3214				9	95%
RL22	75.0	* MAX.	3467				9	96%
Most Accurate	73.0		3338				9	3%
Powder Tested	71.0		3209				9	91%
IMR 4350	70.0	MAX.	3482				8	88%
	68.0		3347				8	86%
	66.0	*	3212				8	3%
Magnum	87.0	MAX.	3513			××	1	04%
	85.0	*	3431			**	1	02%
	83.0		3349				ç	9%
IMR 4831	72.0	MAX.	3540				ç	1%
	70.0		3400				8	88%
	68.0	*	3260				8	86%
MAGPRO	86.5	MAX.	3550			**	1	05%
	84.5		3517			**	1	02%
	82.5	*	3484				1	00%
H4831SC	78.0	* MAX.	3597				9	96%
	76.0		3513				ç	3%
	74.0		3428				ç	1%
N560	76.5	* MAX.	3610				1	00%
	74.5		3505				g	7%
	72.5		3401				ç	5%
RL25	84.5	MAX.	3663			××	1	08%
-								0.50/

3565

3467

82.5

80.5

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary "Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

^{* =} Most accurate load tested

^{** =} Compressed load