


Cartridge

7mm Wby Mag - 140 grain

Version 9.0

NOSLER®

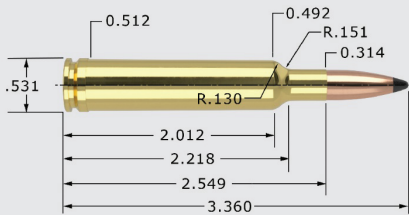

7mm Wby Mag - 140 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.	3.360"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 140gr. Spitzer	3.360"	0.485	0.248
Ballistic Tip®	BT 140gr. Spitzer	3.360"	0.485	0.248
CT® Ballistic Silvertip®	BST 140gr. Spitzer	3.360"	0.485	0.248
Expansion Tip®	ET 140gr. Spitzer	3.330"	0.489	0.248
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.				
Partition®	PT 140gr. Spitzer	3.360"	0.434	0.248

CASE TYPE:	Norma	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	82.0 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL25	76.5 MAX. 3275		** 101%
	74.5 * 3185		99%
	72.5 3094		96%
Magnum	82.0 MAX. 3281		** 102%
	80.0 3206		99%
	78.0 * 3132		97%
IMR 4831	70.0 * MAX. 3292		91%
	68.0 3237		89%
	66.0 3182		86%
MAGPRO	79.5 MAX. 3298		100%
	77.5 3236		97%
	75.5 * 3174		95%
IMR 4350	68.0 MAX. 3320		89%
	66.0 3250		86%
	64.0 * 3180		83%
RL22	73.5 * MAX. 3336		97%
	71.5 3223		95%
	69.5 3111		92%
H4831SC	74.0 * MAX. 3355		94%
	72.0 3275		91%
	70.0 3196		89%
H1000	79.0 MAX. 3363		** 102%
Most Accurate	77.0 * 3273		99%
Powder Tested	75.0 3183		97%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load