


# Cartridge

## 7mm Wby Mag - 150 grain

Version 9.0

# NOSLER®

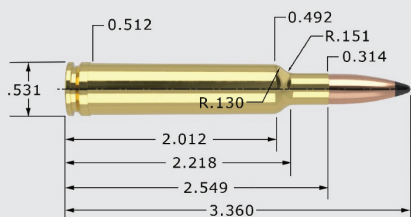

## 7mm Wby Mag - 150 grain

## 7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.360"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	<b>AB</b>	150gr. Spitzer	3.360"	0.493	0.266
AccuBond® Long Range	<b>ABLR</b>	150gr. Spitzer	3.360"	0.546	0.266
Ballistic Tip®	<b>BT</b>	150gr. Spitzer	3.360"	0.493	0.266
CT® Ballistic Silvertip®	<b>BST</b>	150gr. Spitzer	3.360"	0.493	0.266
Expansion Tip®	<b>ET</b>	150gr. Spitzer	3.330"	0.498	0.266
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Partition®	<b>PT</b>	150gr. Spitzer	3.360"	0.456	0.266

CASE TYPE:	Norma	PRIMER TYPE	Rem 9 1/2M
CASE HOLDS:	81.4 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>H4350</b>	67.0 * MAX. 3040		87%
	65.0 2920		85%
	63.0 2800		82%
<b>N165</b>	71.0 * MAX. 3049		97%
	69.0 2959		94%
	67.0 2868		91%
<b>H4831</b>	72.0 * MAX. 3078		92%
	70.0 2973		90%
	68.0 2868		87%
<b>IMR 4350</b>	66.0 * MAX. 3120		87%
	64.0 3060		84%
	62.0 3000		81%
<b>IMR 4831</b>	68.0 * MAX. 3192		89%
	66.0 3097		87%
	64.0 3002		84%
<b>Magnum</b>	81.0 MAX. 3235		** 101%
	79.0 3149		99%
	77.0 * 3062		96%
<b>RL22</b>	72.0 MAX. 3253		96%
	70.0 3147		93%
	68.0 * 3041		91%
<b>H1000</b>	78.0 MAX. 3267		** 101%
	76.0 * 3182		99%
	74.0 3098		96%
<b>Retumbo</b>	80.0 MAX. 3271		** 106%
Most Accurate	78.0 * 3219		** 103%
Powder Tested	76.0 3167		100%
<b>RL25</b>	77.5 MAX. 3298		** 103%
	75.5 3220		** 101%
	73.5 * 3142		98%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load