


Cartridge

7mm Wby Mag - 168 grain

Version 9.0

NOSLER®

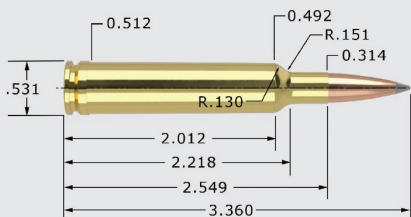

7mm Wby Mag - 168 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.360"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond® Long Range	ABLR	168gr. Spitzer	3.340"	0.616	0.298
Custom Competition®	CC	168gr. HPBT	3.340"	0.520	0.298
CASE TYPE:	Norma		PRIMER TYPE	Rem 9-1/2M	
CASE HOLDS:	78.0	Gr. WATER	BARREL Length/Make	24" Lilja	
			BARREL Twist	1-9"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H4831SC	67.0	MAX. 2956	89%		
	65.0 *	2872	87%		
	63.0	2788	84%		
RL22	69.0	MAX. 2964	96%		
	67.0	2902	93%		
	65.0 *	2840	91%		
IMR 7828 Most Accurate Powder Tested	68.0	MAX. 3000	93%		
	66.0 *	2900	90%		
	64.0	2800	87%		
H1000	75.0	MAX. 3023	** 102%		
	73.0	2946	99%		
	71.0 *	2868	96%		
RL25	71.0	MAX. 3038	99%		
	69.0	2961	96%		
	67.0 *	2885	93%		
MAGPRO	72.0	MAX. 3050	95%		
	70.0 *	2965	93%		
	68.0	2880	90%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load