


Cartridge

7mm Wby Mag - 175 grain

Version 9.0

NOSLER®

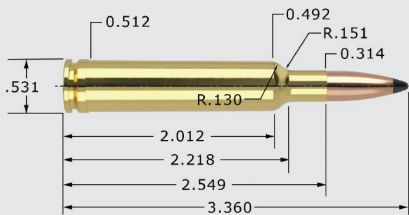

7mm Wby Mag - 175 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.		3.360"	TESTED O.A.C.L.	B.C.	S.D.	
AccuBond® Long Range	ABLR	175gr. Spitzer	3.360"	0.648	0.310	
Partition®	PT	175gr. Spitzer	3.360"	0.519	0.310	
CASE TYPE:	Norma		PRIMER TYPE	Rem 9 1/2M		
CASE HOLDS:	80.0	Gr. WATER	BARREL Length/Make	24" Lilja		
			BARREL Twist	1-9"		
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
N165	65.0	MAX. 2717	<div style="width: 90%;"></div>	90%		
	63.0	2640	<div style="width: 88%;"></div>	88%		
	61.0 *	2563	<div style="width: 85%;"></div>	85%		
IMR 4350	63.0	MAX. 2882	<div style="width: 84%;"></div>	84%		
	61.0	2817	<div style="width: 82%;"></div>	82%		
	59.0 *	2752	<div style="width: 79%;"></div>	79%		
RL22	67.0 *	MAX. 2921	<div style="width: 91%;"></div>	91%		
	65.0	2836	<div style="width: 88%;"></div>	88%		
	63.0	2751	<div style="width: 86%;"></div>	86%		
IMR 4831	64.0	MAX. 2922	<div style="width: 86%;"></div>	86%		
	62.0	2787	<div style="width: 83%;"></div>	83%		
	60.0 *	2652	<div style="width: 80%;"></div>	80%		
IMR 7828	72.0	MAX. 2988	<div style="width: 96%;"></div>	96%		
	Most Accurate	70.0	2883	<div style="width: 93%;"></div>	93%	
	Powder Tested	68.0 *	2778	<div style="width: 90%;"></div>	90%	
Magnum	77.5 *	MAX. 3003	<div style="width: 98%;"></div>	98%		
	75.5	2932	<div style="width: 96%;"></div>	96%		
	73.5	2860	<div style="width: 93%;"></div>	93%		
RL25	73.0	MAX. 3004	<div style="width: 99%;"></div>	99%		
	71.0	2928	<div style="width: 96%;"></div>	96%		
	69.0 *	2853	<div style="width: 94%;"></div>	94%		
H1000	74.0 *	MAX. 3008	<div style="width: 98%;"></div>	98%		
	72.0	2935	<div style="width: 95%;"></div>	95%		
	70.0	2862	<div style="width: 93%;"></div>	93%		
Retumbo	78.0 *	MAX. 3067	<div style="width: 105%;"></div>	**	105%	
	76.0	3006	<div style="width: 102%;"></div>	**	102%	
	74.0	2946	<div style="width: 99%;"></div>		99%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load