


CARTRIDGE

8mm-06 - 180 grain

Version 8.0

Nosler[®]
UP FRONT

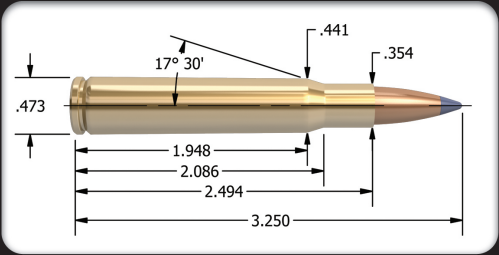

8mm-06 - 180 grain

8mm (.323")

MAXIMUM O.A.C.L. 3.250"

B.C. S.D.

Ballistic Tip [®]	180gr. Spitzer		0.394	0.246
E-Tip [®]	180gr. Spitzer		0.427	0.246

Due to internal construction differences, always begin with starting loads when using E-Tip[®] products.

CASE TYPE:	Winchester (30-06)	PRIMER TYPE	Fed 210M
CASE HOLDS:	60.1 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL15	48.0 * MAX.	2684	83%
	46.0	2575	80%
	44.0	2468	76%
IMR 4350	56.0 MAX.	2704	99%
Most Accurate	54.0	2636	95%
Powder Tested	52.0 *	2525	92%
H380	56.0 MAX.	2763	98%
	54.0	2698	95%
	52.0 *	2608	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load