


CARTRIDGE

9.3x64 Brenneke - 250 grain

Version 8.0

Nosler®

UP FRONT

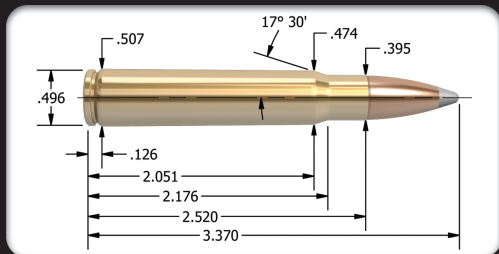

9.3x64 Brenneke - 250 grain

9.3mm (.366")

MAXIMUM CIP O.A.C.L. 3.370"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	250gr. Spitzer	3.345"	0.494	0.267
CASE TYPE:	RWS	PRIMER TYPE	Rem.9 1/2M	
CASE HOLDS:	73.0	Gr. WATER	BARREL Length/Make	
			25" Lothar Walther	
		BARREL Twist	1-14"	

POWDER
TYPE

POWDER CHG.
GRS.

MUZZLE VEL.
F.P.S.

LOAD DENSITY
(VOLUME)

Viht N140	65.0	MAX.	2725		**	104%
	63.0	*	2653			100%
	61.0		2572			97%
IMR 4895	64.0	MAX.	2754			96%
	62.0		2683			93%
	60.0	*	2611			90%
IMR 4350	76.0	* MAX.	2784		**	110%
	74.0		2703		**	107%
	72.0		2621		**	104%
RL15 Most Accurate Powder Tested	67.0	MAX.	2802			96%
	65.0		2730			93%
	63.0	*	2640			90%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load