


CARTRIDGE

9.3x64 Brenneke - 286 grain

Version 8.0

Nosler®

UP FRONT

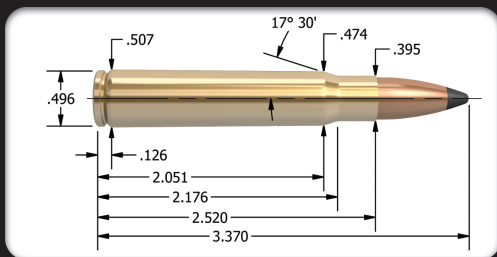

9.3x64 Brenneke - 286 grain

9.3mm (.366")

MAXIMUM CIP O.A.C.L. 3.370"

TESTED O.A.C.L.

B.C.

S.D.

Partition®	286gr. Spitzer	3.305"	0.482	0.307
Solid®	286gr. Solid	3.270"	0.350	0.307

CASE TYPE:	RWS	PRIMER TYPE	Rem. 9 1/2M
CASE HOLDS:	71.4 Gr. WATER	BARREL Length/Make	25" Lothar Walther
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
Viht N140	64.0 MAX.	2554	** 104%
	62.0 *	2485	** 101%
	60.0	2408	98%
IMR 4895	63.0 MAX.	2564	97%
	61.0	2499	94%
	59.0 *	2419	91%
RL15 Most Accurate Powder Tested	66.0 MAX.	2601	96%
	64.0 *	2526	93%
	62.0	2476	90%
IMR 4350	76.0 MAX.	2690	** 113%
	74.0	2621	** 110%
	72.0 *	2551	** 107%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load