


CARTRIDGE

9.3x74R - 250 grain

Version 8.0

Nosler®
UP FRONT

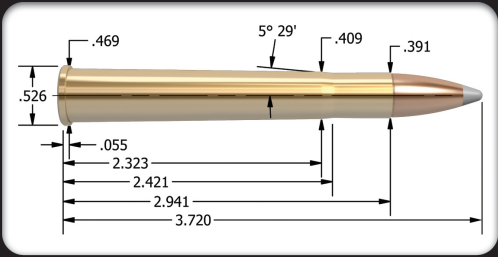

9.3x74R - 250 grain

9.3mm (.366")

MAXIMUM CIP O.A.C.L. 3.720"

TESTED O.A.C.L. B.C. S.D.

AccuBond®			250gr. Spitzer	3.710"	0.494	0.267
CASE TYPE:		Nosler	PRIMER TYPE		Fed. 210	
CASE HOLDS:		68.5	Gr. WATER	BARREL Length/Make		26" Lilja
				BARREL Twist		1-14"

POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Viht N135 Most Accurate Powder Tested	55.5	MAX.	2482			
	53.5		2401			
	51.5	*	2336			
Varget	57.5	MAX.	2490			
	55.5	*	2396			
	53.5		2312			
Viht N140	58.5	MAX.	2515			
	56.5	*	2447			
	54.5		2365			
H380	62.5	MAX.	2540			
	60.5	*	2474			
	58.5		2405			
IMR 4350	68.0	* MAX.	2553			
	66.0		2473			
	64.0		2411			
IMR 4064	59.0	MAX.	2558			
	57.0	*	2483			
	55.0		2410			
RL15	61.0	MAX.	2579			
	59.0	*	2499			
	57.0		2430			
Viht N550	67.0	MAX.	2653			
	65.0		2566			
	63.0	*	2490			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

* = Most accurate load tested

** = Compressed load