


Cartridge

9.3x62 - 250 grain

Version 9.0

NOSLER®

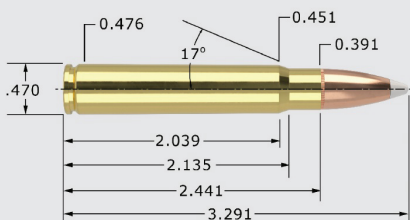

9.3x62 - 250 grain

9.3mm (.366")

MAXIMUM SAAMI O.A.C.L.	3.291"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB 250gr. Spitzer	3.230"	0.494	0.267
Expansion Tip®	ET 250gr. Spitzer	3.230"	0.494	0.267

Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	62.5 Gr. WATER	BARREL Length/Make	26" Lo. Walther
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2015	51.5 MAX. 2467	[Bar]	94%
	49.5 * 2383	[Bar]	90%
	47.5 2298	[Bar]	86%
N135	53.5 MAX. 2495	[Bar]	100%
	51.5 2414	[Bar]	96%
	49.5 * 2334	[Bar]	92%
IMR 3031	53.5 MAX. 2517	[Bar]	95%
	51.5 2432	[Bar]	92%
	49.5 * 2348	[Bar]	88%
Varget	56.5 MAX. 2524	[Bar]	98%
	Most Accurate 54.5 2453	[Bar]	94%
	Powder Tested 52.5 * 2382	[Bar]	91%
N140	57.0 * MAX. 2532	[Bar]	** 106%
	55.0 2466	[Bar]	** 102%
	53.0 2400	[Bar]	99%
IMR 4895	56.0 MAX. 2560	[Bar]	97%
	54.0 * 2484	[Bar]	94%
	52.0 2407	[Bar]	91%
IMR 4320	59.5 * MAX. 2577	[Bar]	** 103%
	57.5 2500	[Bar]	100%
	55.5 2423	[Bar]	97%
IMR 4064	56.0 MAX. 2584	[Bar]	99%
	54.0 2463	[Bar]	95%
	52.0 * 2343	[Bar]	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load