


Cartridge

9.3x62 - 286 grain

Version 9.0

NOSLER®

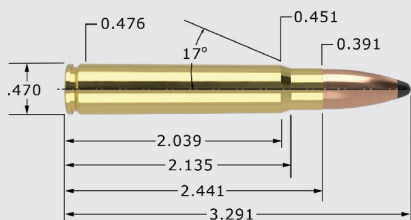

9.3x62 - 286 grain

9.3mm (.366")

MAXIMUM SAAMI O.A.C.L.	3.291"	TESTED O.A.C.L.	B.C.	S.D.	
Partition®	PT	286gr. Spitzer	3.220"	0.482	0.307
Solid®	SD	286gr. Solid	3.210"	0.350	0.307

CASE TYPE:	Nosler	PRIMER TYPE	WLR
CASE HOLDS:	60.4 Gr. WATER	BARREL Length/Make	26" Lo. Walther
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2015	51.0 MAX.	2282	96%
	49.0 *	2214	92%
	47.0	2146	88%
N135 Most Accurate Powder Tested	52.5 * MAX.	2293	** 101%
	50.5	2210	97%
	48.5	2127	93%
IMR 4895	54.0 * MAX.	2336	97%
	52.0	2254	94%
	50.0	2173	90%
N140	56.0 MAX.	2344	** 108%
	54.0	2279	** 104%
	52.0 *	2215	100%
Varget	55.5 MAX.	2356	99%
	53.5 *	2281	96%
	51.5	2206	92%
IMR 4064	54.0 MAX.	2358	99%
	52.0	2253	95%
	50.0 *	2147	91%
IMR 4320	57.5 MAX.	2373	** 103%
	55.5 *	2302	100%
	53.5	2231	96%
RL15	58.5 * MAX.	2424	** 101%
	56.5	2351	97%
	54.5	2277	94%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load