


Cartridge

222 Rem - 55 grain

Version 9.0

NOSLER®

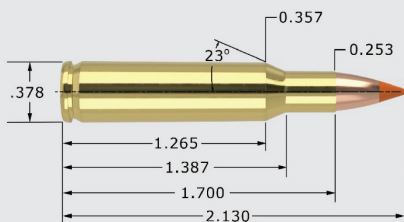

222 Rem - 55 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.130"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	55gr. Spitzer	2.130"	0.267	0.157
Nosler®	CGD	55gr. FBHP	2.130"	0.210	0.157
Nosler®	CGD	55gr. FBSP	2.130"	0.218	0.157
Varmageddon®	VMG	55gr. FB Tipped	2.130"	0.255	0.157
CASE TYPE:	Remington	PRIMER TYPE	Rem 7 1/2		
CASE HOLDS:	24.4 Gr. WATER	BARREL Length/Make	20" Lilja		
		BARREL Twist	1-14"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
RL10x	20.5 MAX.	2931	94%		
	19.5	2798	90%		
	18.5 *	2666	85%		
N120	18.5 MAX.	2931	92%		
	17.5	2818	87%		
	16.5 *	2705	82%		
LT-30	19.5 * MAX.	2932	93%		
	18.5	2793	88%		
	17.5	2655	83%		
W748	24.0 * MAX.	3002	**	102%	
	23.0	2917	98%		
	22.0	2832	94%		
IMR 4198	19.5 * MAX.	3012	93%		
	18.5	2897	88%		
	17.5	2782	83%		
IMR 4895	24.0 * MAX.	3028	**	107%	
	23.0	2883	**	103%	
	22.0	2738	98%		
H335	24.5 * MAX.	3108	**	102%	
	23.5	2983	98%		
	22.5	2858	94%		
H322	22.0 * MAX.	3120	97%		
Most Accurate	21.0	2990	93%		
Powder Tested	20.0	2860	89%		
PP Varmint	24.5 MAX.	3158	**	101%	
	23.5	3040	97%		
	22.5 *	2922	93%		
CFE 223	26.0 MAX.	3206	**	107%	
	25.0	3087	**	102%	
	24.0 *	2969	98%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load