


# CARTRIDGE

30-40 Krag - 200 grain

Version 8.0

# Nosler®

UP FRONT

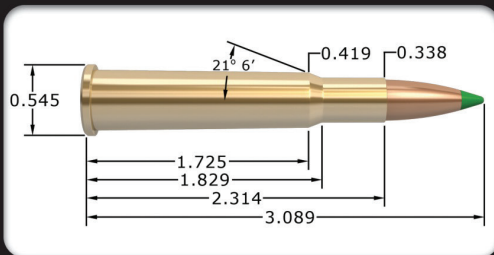

30-40 Krag - 200 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 3.089

B.C. S.D.

AccuBond®	200gr. Spitzer	0.588	0.301
Partition®	200gr. Spitzer	0.481	0.301
CASE TYPE:	Remington	PRIMER TYPE	CCI
CASE HOLDS:	50.8 Gr. WATER	BARREL Length/Make	30" Spfld M1898
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 3031</b>	34.0 MAX.	2080	76%
	32.0	2000	71%
	30.0 *	1920	67%
<b>IMR 4895</b>	36.0 MAX.	2152	78%
	34.0	2037	74%
	32.0 *	1922	69%
<b>IMR 4831</b>	45.0 * MAX.	2238	94%
	43.0	2123	90%
	41.0	2008	86%
<b>IMR 4350</b> Most Accurate Powder Tested	44.0 * MAX.	2348	92%
	42.0	2233	87%
	40.0	2118	83%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load