


# Cartridge

## 30 Nosler - 220 grain

Version 9.0

# NOSLER®

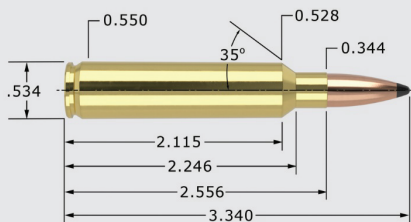

## 30 Nosler - 220 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.	3.340"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	<b>CC</b> 220gr. HPBT	3.340"	0.690	0.331
Partition®	<b>PT</b> 220gr. Semi-Spitzer	3.340"	0.351	0.331

CASE TYPE:	Nosler	PRIMER TYPE	WLRM
CASE HOLDS:	88.2 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>US869</b>	91.0 * MAX.	2872	** 106%
	89.0	2814	** 103%
	87.0	2756	** 101%
<b>H1000</b>	77.5 * MAX.	2898	93%
	75.5	2832	91%
	73.5	2766	88%
<b>H50BMG</b>	89.5 * MAX.	2921	** 105%
	87.5	2861	** 103%
	85.5	2801	** 100%
<b>Retumbo</b>	80.0 MAX.	2924	98%
	78.0 *	2851	95%
	76.0	2777	93%
<b>MAGPRO</b>	79.0 * MAX.	2924	92%
	77.0	2853	90%
	75.0	2781	88%
<b>Norma 217</b>	79.5 MAX.	2927	** 101%
	Most Accurate 77.5 *	2838	99%
	Powder Tested 75.5	2748	96%
<b>RL25</b>	80.0 * MAX.	2949	99%
	78.0	2871	96%
	76.0	2792	94%
<b>RL33</b>	85.0 MAX.	2965	98%
	83.0	2890	96%
	81.0 *	2814	94%
<b>LRT</b>	89.5 * MAX.	2971	** 101%
	87.5	2901	99%
	85.5	2831	96%
<b>Magnum</b>	81.5 MAX.	2981	94%
	79.5	2905	92%
	77.5 *	2829	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load