


Cartridge

325 WSM - 200 grain

Version 9.0

NOSLER[®]

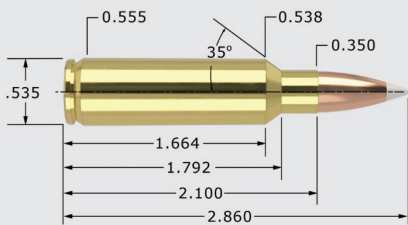

325 WSM - 200 grain

8mm (.323")

MAXIMUM SAAMI O.A.C.L.		2.860"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond [®]	AB	200gr. Spitzer	2.860"	0.450	0.274
Custom Competition [®]	CC	200gr. HPBT	2.860"	0.520	0.274
Partition [®]	PT	200gr. Spitzer	2.860"	0.426	0.274
CASE TYPE:	Nosler		PRIMER TYPE	WLRM	
CASE HOLDS:	68.9	Gr. WATER	BARREL Length/Make	26" Wiseman	
			BARREL Twist	1-10"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
W760	63.0 * MAX.	2889	96%		
		2814	93%		
	59.0	2739	90%		
IMR 4350	65.0 * MAX.	2907	**	101%	
	63.0	2830	98%		
	61.0	2752	95%		
H414	64.0 MAX.	2922	97%		
	62.0 *	2854	94%		
	60.0	2786	91%		
Big Game	63.0 * MAX.	2924	93%		
	61.0	2850	90%		
	59.0	2777	87%		
H4350 Most Accurate Powder Tested	64.5 MAX.	2927	99%		
	62.5 *	2869	96%		
	60.5	2811	93%		
IMR 4831	67.0 MAX.	2930	**	104%	
	65.0	2861	**	101%	
	63.0 *	2792	98%		
Hunter	67.0 MAX.	2948	**	100%	
	65.0	2865	97%		
	63.0 *	2782	94%		
N560	70.0 MAX.	2950	**	113%	
	68.0	2862	**	110%	
	66.0 *	2773	**	106%	
RL19	69.0 MAX.	2964	**	109%	
	67.0 *	2883	**	106%	
	65.0	2802	**	103%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load