


Cartridge

350 Rem Mag - 250 grain

Version 9.0

NOSLER®

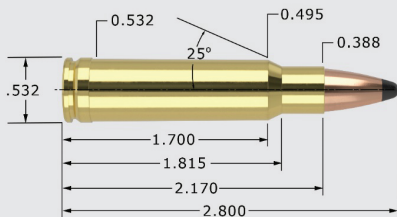

350 Rem Mag - 250 grain

35 Cal. (.358")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
-------------------------------	---------------	------------------------	-------------	-------------

Partition®	PT	250gr. Spitzer	2.780"	0.446	0.279
------------	-----------	----------------	--------	-------	-------

CASE TYPE:	Remington	PRIMER TYPE	CCI 250
CASE HOLDS:	58.6 Gr. WATER	BARREL Length/Make	22" Lilja
		BARREL Twist	1-16"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320	53.0 MAX. 2380		98%
	51.0 2290		95%
	49.0 * 2201		91%
RL15 Most Accurate Powder Tested	55.0 MAX. 2422		98%
	53.0 2322		94%
	51.0 * 2223		91%
AA 2460	52.0 * MAX. 2454		90%
	50.0 2382		86%
	48.0 2309		83%
AA 2015	51.0 MAX. 2471		99%
	49.0 2385		95%
	47.0 * 2299		91%
AA 2520	55.0 * MAX. 2507		97%
	53.0 2432		93%
	51.0 2357		90%
W748	58.0 MAX. 2571		** 103%
	56.0 2472		100%
	54.0 * 2374		96%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load