


Cartridge

6.5 CM - 123/125 grain

Version 9.0

NOSLER®

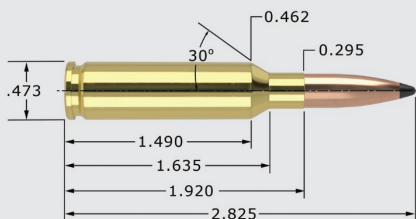

6.5 CM - 123/125 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		2.825"	TESTED O.A.C.L.	B.C.	S.D.
Custom Competition®	CC	123gr. HPBT	2.650"	0.510	0.252
Partition®	PT	125gr. Spitzer	2.790"	0.449	0.256
CASE TYPE:	Nosler		PRIMER TYPE	Fed 210	
CASE HOLDS:	49.5	Gr. WATER	BARREL Length/Make	24" Pac-Nor	
			BARREL Twist	1-8"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
Varget	39.0	MAX. 2860		85%	
	37.0	2754		81%	
	35.0 *	2649		76%	
IMR 4895	39.0	MAX. 2893		86%	
	37.0 *	2781		81%	
	35.0	2668		77%	
Big Game	43.5 *	MAX. 2905		90%	
	41.5	2794		86%	
	39.5	2683		81%	
W760	44.0	MAX. 2929		93%	
	42.0	2817		89%	
	40.0 *	2705		85%	
RL15	40.5	MAX. 2938		85%	
	38.5	2825		81%	
	36.5 *	2712		77%	
H4350	44.5	MAX. 2985		95%	
	42.5 *	2878		91%	
	40.5	2772		87%	
RL17	44.5	MAX. 3001		93%	
	42.5 *	2880		89%	
	40.5	2759		85%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load