


Cartridge

204 Ruger - 32/34 grain

Version 9.0

NOSLER®

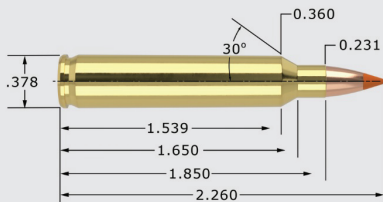

204 Ruger - 32/34 grain

20 Cal. (.204")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Lead-Free	BTLF	32gr. Spitzer	2.250"	0.228	0.110
Ballistic Tip® Varmint	BTV	32gr. Spitzer	2.250"	0.206	0.110
Varmageddon®	VMG	32gr. FB Tipped	2.250"	0.204	0.110
Nosler®	C&D	34gr. FBHP	2.220"	0.135	0.117

CASE TYPE:	Nosler	PRIMER TYPE	Fed 205M
CASE HOLDS:	30.6 Gr. WATER	BARREL Length/Make	26" Pac-Nor
		BARREL Twist	1-12"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2015	24.5 MAX.	3814	91%
	23.5 *	3685	87%
	22.5	3556	84%
TAC	26.0 MAX.	3863	86%
	25.0 *	3800	83%
	24.0	3737	80%
Benchmark	26.5 * MAX.	3928	94%
	25.5	3814	90%
	24.5	3700	87%
H322	25.5 * MAX.	3991	90%
	24.5	3834	87%
	23.5	3677	83%
W748	28.5 MAX.	3997	97%
	27.5 *	3853	94%
	26.5	3709	90%
H335	27.0 * MAX.	4048	90%
	26.0	3931	86%
	25.0	3815	83%
IMR 4198 Most Accurate Powder Tested	23.0 MAX.	4060	87%
	22.0	3910	83%
	21.0 *	3760	80%
Varget	29.0 MAX.	4062	** 102%
	28.0 *	3937	99%
	27.0	3812	95%
PP Varmint	29.5 * MAX.	4087	97%
	28.5	3887	94%
	27.5	3688	91%
CFE 223	31.0 MAX.	4158	** 101%
	30.0	3994	98%
	29.0 *	3830	95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.
 In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested
 ** = Compressed load