


Cartridge

22-250 Ack Imp (Fast Twist) - 60/62 grain

Version 9.0

NOSLER®

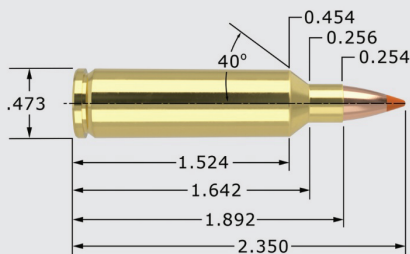

22-250 Ack Imp (Fast Twist) - 60/62 grain 22 Cal. (.224")

MAXIMUM O.A.C.L.		2.350"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	60gr. Spitzer	2.350"	0.270	0.171
Partition®	PT	60gr. Spitzer	2.350"	0.228	0.171
Varmageddon®	VMG	62gr. FBHP	2.350"	0.251	0.176

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	48.0 Gr. WATER	BARREL Length/Make	26" Shilen
		BARREL Twist	1-8"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
H4831SC	44.0 MAX.	3522	95%
	42.0	3368	91%
	40.0 *	3213	87%
IMR 4895	35.5 * MAX.	3551	80%
	Most Accurate	3382	76%
	Powder Tested	31.5	3213
IMR 4350	41.0 MAX.	3559	91%
	39.0 *	3405	87%
	37.0	3252	82%
IMR 4064	35.5 MAX.	3564	82%
	33.5 *	3410	77%
	31.5	3256	73%
Big Game	39.0 MAX.	3572	83%
	37.0	3376	79%
	35.0 *	3179	74%
IMR 4831	42.0 MAX.	3597	94%
	40.0 *	3427	89%
	38.0	3257	85%
N540	36.5 * MAX.	3621	84%
	34.5	3498	80%
	32.5	3374	75%
Varget	36.5 * MAX.	3625	82%
	34.5	3494	78%
	32.5	3364	73%
RL15	36.5 MAX.	3637	79%
	34.5 *	3467	75%
	32.5	3298	71%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load