


Cartridge

22 BR - 50/52/53 grain

Version 9.0

NOSLER®

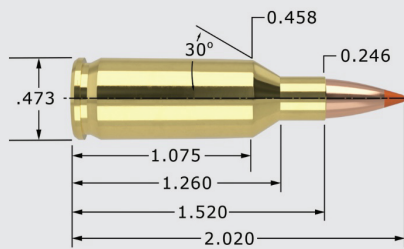

22 BR - 50/52/53 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.020"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV	50gr. Spitzer	2.020"	0.238	0.142
Nosler®	CB0	50gr. FBHP	1.970"	0.192	0.142
Nosler®	CB0	50gr. FBSP	2.000"	0.195	0.142
Varmageddon®	VMG	50gr. FB Tipped	2.020"	0.227	0.142
Custom Competition®	CC	52gr. HPBT	2.020"	0.220	0.148
Varmageddon®	VMG	53gr. FB Tipped	2.020'	0.303	0.152

CASE TYPE:	Remington	PRIMER TYPE	WSR
CASE HOLDS:	34.5 Gr. WATER	BARREL Length/Make	24" Lilja
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL7 Most Accurate Powder Tested	27.5 * MAX. 3500		87%
	25.5 3227		80%
	23.5 2953		74%
AA 2230	31.0 * MAX. 3536		92%
	29.0 3280		86%
	27.0 3024		80%
AA 2015	30.0 MAX. 3541		99%
	28.0 3243		92%
	26.0 * 2944		86%
H322	30.5 MAX. 3556		96%
	28.5 3362		89%
	26.5 * 3169		83%
IMR 3031	30.5 * MAX. 3593		98%
	28.5 3302		92%
	26.5 3012		85%
BL-C(2)	35.0 MAX. 3642		** 103%
	33.0 3431		97%
	31.0 * 3221		91%
Varget	32.5 MAX. 3664		** 102%
	30.5 3417		96%
	28.5 * 3170		89%
N135	32.0 MAX. 3669		** 108%
	30.0 3446		** 101%
	28.0 * 3222		94%
IMR 4895	32.5 MAX. 3681		** 103%
	30.5 3373		96%
	28.5 * 3065		90%
W748	34.5 MAX. 3700		** 104%
	32.5 3450		98%
	30.5 * 3201		92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary
 * Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

* = Most accurate load tested

** = Compressed load