


# Cartridge

## 220 Swift - 55 grain

Version 9.0

# NOSLER®

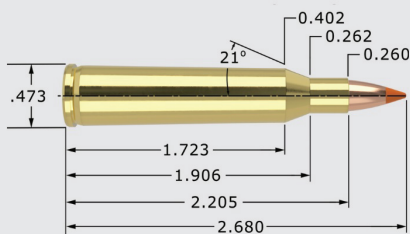

## 220 Swift - 55 grain

## 22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.680"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	<b>BTV</b>	55gr. Spitzer	2.670"	0.267	0.157
Nosler®	<b>CB0</b>	55gr. FBHP	2.650"	0.210	0.157
Nosler®	<b>CB0</b>	55gr. FBSP	2.670"	0.218	0.157
Varmageddon®	<b>VMG</b>	55gr. FB Tipped	2.670"	0.255	0.157

CASE TYPE:	Winchester	PRIMER TYPE	CCI 200
CASE HOLDS:	46.4 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>Varget</b>	35.0 * MAX.	3587	82%
		3415	77%
		3243	72%
<b>H414</b>	40.5 MAX.	3661	91%
		3437	86%
	36.5 *	3213	82%
<b>RL15</b>	37.0 * MAX.	3665	83%
		3568	79%
		3471	74%
<b>N150</b>	38.0 * MAX.	3736	96%
		3550	91%
		3364	86%
<b>IMR 4064</b>	38.0 * MAX.	3767	90%
		3533	86%
		3299	81%
<b>H380</b>	40.0 MAX.	3770	91%
		3660	86%
	36.0 *	3550	82%
<b>AA 2520</b>	37.5 * MAX.	3780	83%
		3630	79%
		3480	74%
<b>IMR 4320</b>	37.0 MAX.	3792	87%
		3637	82%
	33.0 *	3482	77%
<b>W760</b>	42.0 MAX.	3830	95%
		3628	90%
	38.0 *	3427	86%
<b>IMR 4831</b>	44.0 * MAX.	3855	** 101%
Most Accurate	42.0	3670	97%
Powder Tested	40.0	3485	92%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load