


Cartridge

220 Swift - 60/62 grain

Version 9.0

NOSLER®

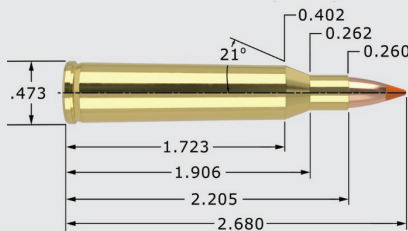

220 Swift - 60/62 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.680"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip® Varmint	BTV 60gr. Spitzer	2.680"	0.270	0.171
Partition®	PT 60gr. Spitzer	2.680"	0.228	0.171
Varmageddon®	VMG 62gr. FBHP	2.680"	0.251	0.176

CASE TYPE:	Winchester	PRIMER TYPE	CCI 200
CASE HOLDS:	47.0 Gr. WATER	BARREL Length/Make	26" H-S Prec.
		BARREL Twist	1-14"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
RL15	35.5 MAX.	3598	79%
	33.5	3459	74%
	31.5 *	3320	70%
Big Game	38.0 * MAX.	3613	83%
	36.0	3493	78%
	34.0	3374	74%
IMR 4320	36.0 MAX.	3616	83%
	34.0 *	3437	79%
	32.0	3259	74%
W760	39.5 MAX.	3638	88%
	37.5 *	3523	84%
	35.5	3408	79%
IMR 4350	39.5 * MAX.	3639	90%
Most Accurate	37.5	3489	85%
Powder Tested	35.5	3339	81%
RL22	43.0 MAX.	3643	99%
	41.0	3496	95%
	39.0 *	3348	90%
H414	40.5 MAX.	3676	90%
	38.5 *	3536	85%
	36.5	3396	81%
RL19	43.0 * MAX.	3689	99%
	41.0	3569	95%
	39.0	3450	90%
IMR 4831	43.0 * MAX.	3712	98%
	41.0	3582	93%
	39.0	3453	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load