


Cartridge

222 Rem - 34/35 grain

Version 9.0

NOSLER®

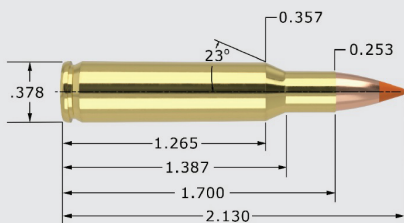

222 Rem - 34/35 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.	2.130"	TESTED O.A.C.L.	B.C.	S.D.
Nosler®	C&D 34gr. FBHP	2.020"	0.113	0.097
Ballistic Tip® Lead-Free	BTLF 35gr. Spitzer	2.130"	0.201	0.100

CASE TYPE:	Remington	PRIMER TYPE	Rem 7 1/2	
CASE HOLDS:	23.6 Gr. WATER	BARREL Length/Make	20" Lilja	
		BARREL Twist	1-14"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2015	24.0 MAX. 3540		** 116%
Most Accurate Powder Tested	23.0 * 3426		** 111%
	22.0 3313		** 106%
Benchmark	25.0 * MAX. 3594		** 115%
	24.0 3456		** 110%
	23.0 3319		** 105%
N133	23.0 * MAX. 3600		** 113%
	22.0 3396		** 108%
	21.0 3191		** 103%
H322	25.0 MAX. 3703		** 115%
	24.0 3571		** 110%
	23.0 * 3439		** 105%
Norma 200	22.5 MAX. 3704		** 110%
	21.5 * 3505		** 105%
	20.5 3307		100%
AA 1680	21.5 MAX. 3741		96%
	20.5 3576		91%
	19.5 * 3412		87%
RL7	22.5 MAX. 3770		** 104%
	21.5 3552		99%
	20.5 * 3334		94%
LT-30	22.5 MAX. 3770		** 111%
	21.5 * 3570		** 106%
	20.5 3371		** 101%
IMR 4198	21.0 MAX. 3815		** 103%
	20.0 3595		98%
	19.0 * 3376		93%
H4198	21.5 MAX. 3821		** 102%
	20.5 * 3595		98%
	19.5 3368		93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load