


Cartridge

222 Rem - 40 grain

Version 9.0

NOSLER®

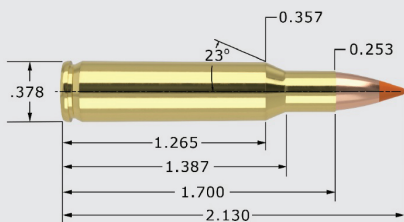

222 Rem - 40 grain

22 Cal. (.224")

MAXIMUM SAAMI O.A.C.L.		2.130"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip® Varmint	BTV	40gr. Spitzer	2.130"	0.221	0.114	
Varmageddon®	VMG	40gr. FB Tipped	2.130"	0.211	0.114	
CASE TYPE:	Remington	PRIMER TYPE	Rem 7 1/2			
CASE HOLDS:	25.8 Gr. WATER	BARREL Length/Make	20" Lilja			
		BARREL Twist	1-14"			
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
AA 2230	25.0 * MAX.	3336	99%			
	24.0	3217	95%			
	23.0	3099	91%			
PP Varmint	26.0 * MAX.	3402	** 102%			
	25.0	3278	98%			
	24.0	3155	94%			
RL7	22.0 * MAX.	3428	93%			
	21.0	3306	88%			
	20.0	3183	84%			
RL10x	23.0 MAX.	3437	100%			
	22.0 *	3252	96%			
	21.0	3066	91%			
H322	24.0 * MAX.	3490	** 101%			
	23.0	3322	96%			
	22.0	3154	92%			
IMR 4198	21.0 * MAX.	3522	94%			
	20.0	3314	90%			
	19.0	3107	85%			
H335	27.0 MAX.	3536	** 106%			
	26.0 *	3416	** 102%			
	25.0	3295	98%			
AA 2015	24.5 MAX.	3540	** 108%			
	Most Accurate	23.5	3396	** 104%		
	Powder Tested	22.5 *	3252	99%		
N120	21.5 MAX.	3564	** 102%			
	20.5	3422	97%			
	19.5 *	3281	92%			
LT-30	22.0 * MAX.	3586	99%			
	21.0	3349	95%			
	20.0	3112	90%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load