


# CARTRIDGE

25 Winchester Super Short Magnum - 100 grain

Version 8.0

# Nosler

UP FRONT

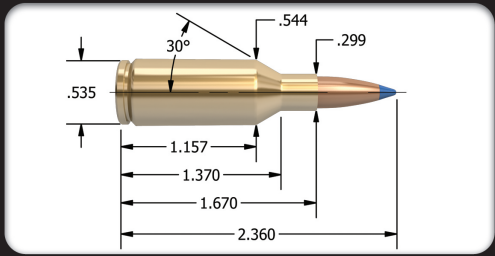

25 WSSM - 100 grain

25 Cal. (.257")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.360"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	100gr. Spitzer	2.350"	0.393	0.216
E-Tip®	100gr. Spitzer	2.320"	0.409	0.216
Due to internal construction differences, always begin with starting loads when using E-Tip® products.				
Partition®	100gr. Spitzer	2.350"	0.377	0.216
CASE TYPE:	Winchester	PRIMER TYPE	WLR	
CASE HOLDS:	50.2 Gr. WATER	BARREL Length/Make	24" Wiseman	
		BARREL Twist	1-10"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
<b>IMR 4895</b>	39.5 MAX.	3161	86%
	37.5	3035	82%
	35.5 *	2913	78%
<b>Varget</b> Most Accurate Powder Tested	41.0 * MAX.	3184	88%
	39.0	3075	84%
	37.0	2957	80%
<b>H380</b>	45.0 MAX.	3216	94%
	43.0 *	3103	90%
	41.0	2981	86%
<b>IMR 4064</b>	41.5 * MAX.	3219	91%
	39.5	3091	86%
	37.5	2960	82%
<b>H4350</b>	47.0 MAX.	3252	99%
	45.0	3144	95%
	43.0 *	3028	91%
<b>IMR 4350</b>	46.5 * MAX.	3255	98%
	44.5	3136	94%
	42.5	3012	90%
<b>IMR 4831</b>	48.5 MAX.	3268	** 103%
	46.5	3153	99%
	44.5 *	3019	94%
<b>Big Game</b>	46.0 MAX.	3269	96%
	44.0	3175	92%
	42.0 *	3050	88%
<b>H414</b>	47.5 MAX.	3276	99%
	45.5	3159	94%
	43.5 *	3043	90%
<b>W760</b>	47.5 MAX.	3291	99%
	45.5	3180	95%
	43.5 *	3053	91%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.

\* = Most accurate load tested

\*\* = Compressed load