


CARTRIDGE

25 Winchester Super Short Magnum - 115 grain

Version 8.0

Nosler

UP FRONT

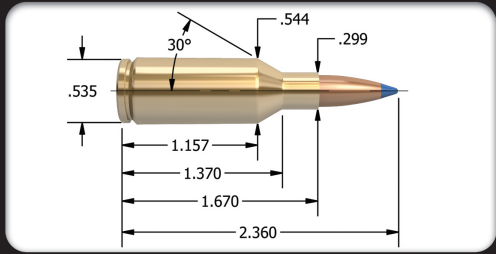

25 WSSM - 115 grain

25 Cal. (.257")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.360"

TESTED O.A.C.L.

B.C.

S.D.

Ballistic Tip®	115gr. Spitzer	2.350"	0.453	0.249
CT® Ballistic Silvertip®	115gr. Spitzer	2.350"	0.453	0.249
Partition®	115gr. Spitzer	2.350"	0.389	0.249

CASE TYPE:	Winchester	PRIMER TYPE	WLR
CASE HOLDS:	49.0 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MAX.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4064 Most Accurate Powder Tested	39.5	MAX.	2937	89%
	37.5		2820	84%
	35.5 *		2683	80%
Big Game	43.0	MAX.	2970	92%
	41.0		2854	88%
	39.0 *		2748	84%
H4831SC	48.0	MAX.	2974	** 102%
	46.0		2876	98%
	44.0 *		2771	94%
IMR 4350	44.5	MAX.	2983	96%
	42.5 *		2910	92%
	40.5		2782	87%
H380	44.0	MAX.	3000	95%
	42.0		2901	90%
	40.0 *		2790	86%
IMR 4831	46.5	MAX.	3018	** 101%
	44.5 *		2888	97%
	42.5		2740	92%
H4350	45.0	MAX.	3026	97%
	43.0 *		2927	93%
	41.0		2815	89%
H414	45.5	MAX.	3049	97%
	43.5		2939	92%
	41.5 *		2824	88%
W760	45.5 * MAX.		3052	97%
	43.5		2938	93%
	41.5		2829	89%
Hunter	48.0	MAX.	3083	** 103%
	46.0 *		3010	99%
	44.0		2942	95%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load