


Cartridge

257 Ack Imp - 120 grain

Version 9.0

NOSLER®

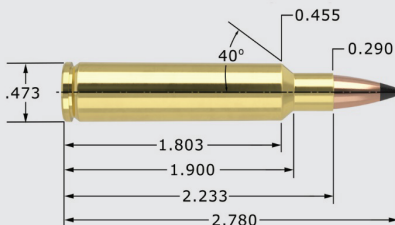

257 Ack Imp - 120 grain

25 Cal. (.257")

MAXIMUM O.A.C.L.		2.780"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	120gr. Spitzer	2.780"	0.391	0.260
CASE TYPE:	Nosler	PRIMER TYPE	Fed 210		
CASE HOLDS:	56.6 Gr. WATER	BARREL Length/Make	24" Wiseman		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
H380	43.0 MAX.	2798	80%		
	41.0	2673	76%		
	39.0 *	2548	73%		
N160	46.5 MAX.	2842	91%		
	44.5	2727	87%		
	42.5 *	2613	83%		
RL22	47.5 * MAX.	2847	91%		
	45.5	2732	87%		
	43.5	2617	84%		
IMR 4350	45.5 MAX.	2851	86%		
	43.5	2736	82%		
	41.5 *	2621	78%		
IMR 7828	50.5 * MAX.	2858	95%		
	48.5	2723	91%		
	46.5	2588	87%		
Varget	41.0 MAX.	2869	78%		
	39.0	2767	74%		
	37.0 *	2666	71%		
Hunter	47.5 MAX.	2882	87%		
	45.5 *	2788	83%		
	43.5	2694	79%		
RL19	47.5 * MAX.	2898	91%		
Most Accurate	45.5	2773	87%		
Powder Tested	43.5	2648	84%		
H4831SC	50.5 MAX.	2972	93%		
	48.5	2855	89%		
	46.5 *	2738	86%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load