


Cartridge

257 Wby Mag - 115 grain

Version 9.0

NOSLER®

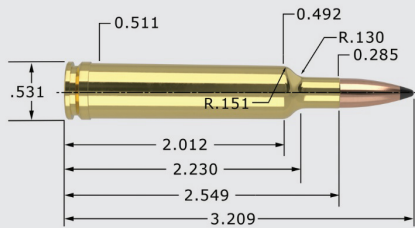

257 Wby Mag - 115 grain

25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.		3.209"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT	115gr. Spitzer	3.209"	0.453	0.249
CT® Ballistic Silvertip®	BST	115gr. Spitzer	3.209"	0.453	0.249
Partition®	PT	115gr. Spitzer	3.209"	0.389	0.249

CASE TYPE:	Nosler	PRIMER TYPE	Fed 215
CASE HOLDS:	81.0 Gr. WATER	BARREL Length/Make	26" Lilja
		BARREL Twist	1-10"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)	
IMR 4350	59.0 * MAX.	3115	78%	
		3034	75%	
		2952	73%	
Hunter	61.5 MAX.	3198	78%	
	59.5 *	3052	76%	
	57.5	2905	73%	
N165	66.0 MAX.	3214	91%	
		3124	88%	
	62.0 *	3034	85%	
RL19	65.0 MAX.	3255	87%	
	63.0 *	3184	85%	
		3114	82%	
IMR 4831	64.0 * MAX.	3281	85%	
		3184	82%	
		3086	79%	
RL22	67.0 MAX.	3281	90%	
	65.0 *	3211	87%	
		3140	85%	
RL25	72.0 MAX.	3301	97%	
	Most Accurate Powder Tested	70.0 *	3186	94%
		68.0	3070	91%
H1000	71.5 MAX.	3302	93%	
	69.5 *	3222	91%	
		3142	88%	
IMR 7828	69.0 MAX.	3435	91%	
	67.0 *	3337	88%	
		3239	85%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load