


# Cartridge

## 257 Wby Mag - 120 grain

Version 9.0

# NOSLER®

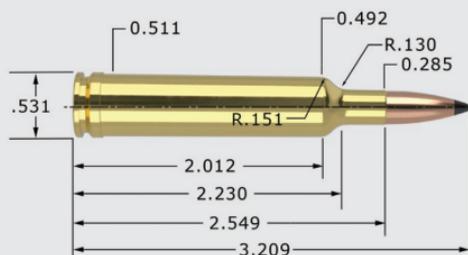

## 257 Wby Mag - 120 grain

## 25 Cal. (.257")

MAXIMUM SAAMI O.A.C.L.		3.209"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	120gr. Spitzer	3.209"	0.391	0.260
CASE TYPE:	Nosler	PRIMER TYPE	Fed 215		
CASE HOLDS:	81.2 Gr. WATER	BARREL Length/Make	26" Lilja		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>IMR 4350</b>	59.0 * MAX.	3090	78%		
	57.0	3010	75%		
	55.0	2930	72%		
<b>N165</b>	66.0 MAX.	3183	90%		
	64.0	3094	88%		
	62.0 *	3005	85%		
<b>Hunter</b>	62.0 MAX.	3198	79%		
	60.0 *	3120	76%		
	58.0	3042	74%		
<b>RL25</b> Most Accurate Powder Tested	71.0 * MAX.	3225	95%		
	69.0	3131	92%		
	67.0	3037	90%		
<b>H1000</b>	70.0 MAX.	3230	91%		
	68.0 *	3148	89%		
	66.0	3066	86%		
<b>IMR 4831</b>	64.0 MAX.	3258	84%		
	62.0	3153	82%		
	60.0 *	3048	79%		
<b>RL19</b>	65.0 * MAX.	3260	87%		
	63.0	3175	84%		
	61.0	3089	82%		
<b>RL22</b>	67.0 MAX.	3283	90%		
	65.0 *	3195	87%		
	63.0	3107	84%		
<b>IMR 7828</b>	69.0 MAX.	3405	90%		
	67.0 *	3307	88%		
	65.0	3209	85%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load