


# Cartridge

26 Nosler - 100 grain

Version 9.0

# NOSLER®

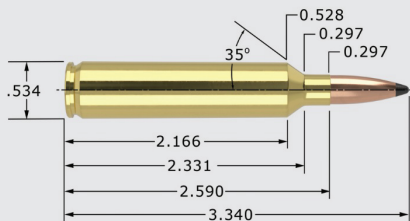

26 Nosler - 100 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip®	<b>BT</b>	100gr. Spitzer	3.300"	0.350	0.205	
Custom Competition®	<b>CC</b>	100gr. HPBT	3.300"	0.362	0.205	
Partition®	<b>PT</b>	100gr. Spitzer	3.300"	0.326	0.205	
CASE TYPE:	Nosler		PRIMER TYPE	WLRM		
CASE HOLDS:	96.2	Gr. WATER	BARREL Length/Make	26" Pac-Nor		
			BARREL Twist	1-8"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
<b>N165</b>	81.0 * MAX.	3774	94%			
	79.0	3692	91%			
	77.0	3610	89%			
<b>IMR 7828 SSC</b>	79.0 MAX.	3797	85%			
	77.0 *	3762	83%			
	75.0	3727	80%			
<b>Returnbo</b>	85.0 * MAX.	3798	95%			
	83.0	3754	93%			
	81.0	3710	91%			
<b>H1000</b>	84.0 * MAX.	3800	92%			
	82.0	3737	90%			
	80.0	3674	88%			
<b>RL25</b>	85.0 MAX.	3830	96%			
	83.0 *	3735	94%			
	81.0	3640	92%			
<b>Norma 217</b>	87.0 MAX.	3865	** 102%			
	Most Accurate	85.0 *	3787	99%		
	Powder Tested	83.0	3709	97%		
<b>MAGPRO</b>	85.0 * MAX.	3900	91%			
	83.0	3790	89%			
	81.0	3680	87%			
<b>RL33</b>	92.0 MAX.	3901	98%			
	90.0 *	3756	95%			
	88.0	3611	93%			
<b>Magnum</b>	86.0 MAX.	3910	91%			
	84.0	3816	89%			
	82.0 *	3722	87%			
<b>US869</b>	99.0 MAX.	3961	** 106%			
	97.0 *	3852	** 103%			
	95.0	3743	** 101%			

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data. In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data."

\* = Most accurate load tested

\*\* = Compressed load