


Cartridge

260 Rem - 100 grain

Version 9.0

NOSLER®

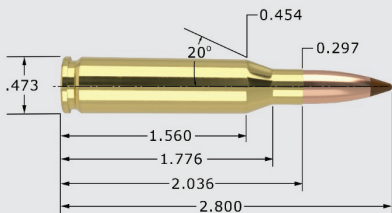

260 Rem - 100 grain

6.5mm (.264")

MAXIMUM SAAMI O.A.C.L.	2.800"	TESTED O.A.C.L.	B.C.	S.D.
Ballistic Tip®	BT 100gr. Spitzer	2.800"	0.350	0.205
Custom Competition®	CC 100gr. HPBT	2.800"	0.362	0.205
Partition®	PT 100gr. Spitzer	2.800"	0.326	0.205

CASE TYPE:	Nosler	PRIMER TYPE	Rem 9 1/2
CASE HOLDS:	50.2 Gr. WATER	BARREL Length/Make	24" Wiseman
		BARREL Twist	1-9"

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
AA 2460	39.0 MAX.	3158	78%
	37.0	2987	74%
	35.0 *	2817	70%
Varget	43.0 MAX.	3227	93%
	41.0 *	3112	88%
	39.0	2997	84%
RL15	43.0 MAX.	3244	89%
	41.0 *	3122	85%
	39.0	2999	81%
IMR 4350	47.5 MAX.	3248	** 101%
	45.5	3108	97%
	43.5 *	2968	93%
N540	43.0 * MAX.	3253	95%
	41.0	3125	91%
	39.0	2998	86%
H4350	48.5 MAX.	3278	** 102%
	46.5	3160	98%
	44.5 *	3042	94%
IMR 4064 Most Accurate Powder Tested	43.0 MAX.	3286	95%
	41.0 *	3143	90%
	39.0	3001	86%
Big Game	47.5 MAX.	3312	97%
	45.5	3189	92%
	43.5 *	3066	88%
W760	48.0 * MAX.	3326	100%
	46.0	3208	96%
	44.0	3091	92%
H414	49.0 MAX.	3366	** 102%
	47.0	3238	98%
	45.0 *	3111	93%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load