


# Cartridge

## 270 Wby Mag - 110 grain

## Version 9.0

# NOSLER®

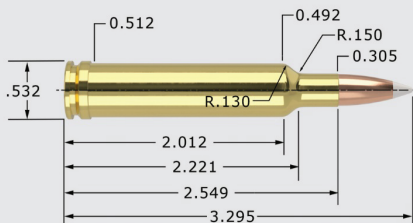

## 270 Wby Mag - 110 grain

## 270 Cal. (.277")

MAXIMUM SAAMI O.A.C.L.		3.295"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®		<b>AB</b> 110gr. Spitzer	3.200"	0.370	0.205
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	82.0 Gr. WATER	BARREL Length/Make	26" Lilja		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>RL22</b>	74.5 MAX. 3494		99%		
	72.5 * 3373		96%		
	70.5 3252		93%		
<b>H4831SC</b>	74.0 * MAX. 3522		94%		
	72.0 3409		91%		
	70.0 3296		89%		
<b>IMR 4350</b>	70.0 MAX. 3529		91%		
Most Accurate Powder Tested	68.0 * 3391		89%		
	66.0 * 3253		86%		

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load