


Cartridge

28 Nosler - 120 grain

Version 9.0

NOSLER®

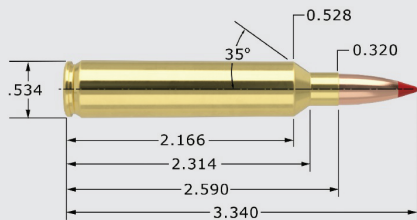

28 Nosler - 120 grain

7mm (.284")

MAXIMUM SAAMI O.A.C.L.			3.340"	TESTED O.A.C.L.	B.C.	S.D.	
Ballistic Tip®			BT	120gr. Spitzer	3.340"	0.417	0.213
CASE TYPE:	Nosler		PRIMER TYPE			WLRM	
CASE HOLDS:	95.9	Gr. WATER	BARREL Length/Make			26" Pac-Nor	
			BARREL Twist			1-9"	
POWDER TYPE	POWDER CHG. GRS.		MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)			
RL22	85.0	MAX. 3633				96%	
	83.0	3536				94%	
	81.0 *	3438				92%	
Retumbo Most Accurate Powder Tested	92.0	MAX. 3654			**	103%	
	90.0 *	3568			**	101%	
	88.0	3482				99%	
IMR 7828 SSC	85.0 *	MAX. 3683				91%	
	83.0	3592				89%	
	81.0	3502				87%	
US869	103.0	MAX. 3708			**	110%	
	101.0	3638			**	108%	
	99.0 *	3568			**	106%	
RL26	87.0	MAX. 3711				93%	
	85.0 *	3559				90%	
	83.0	3407				88%	
Magnum	92.0 *	MAX. 3712				97%	
	90.0	3640				95%	
	88.0	3568				93%	
N165	87.0	MAX. 3714			**	101%	
	85.0 *	3598				98%	
	83.0	3481				96%	
Norma 217	93.0	MAX. 3716			**	109%	
	91.0 *	3619			**	107%	
	89.0	3523			**	104%	
RL25	90.0 *	MAX. 3768			**	102%	
	88.0	3633				100%	
	86.0	3498				97%	
Norma MRP	86.0	MAX. 3800				99%	
	84.0 *	3705				96%	
	82.0	3609				94%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load