


# Cartridge

## 30-30 Win - 170 grain

## Version 9.0

# NOSLER®

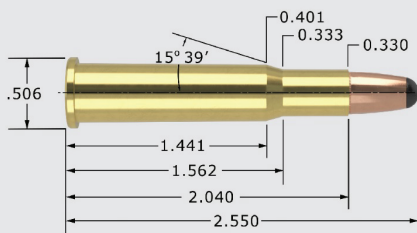

## 30-30 Win - 170 grain

## 30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.550"	TESTED O.A.C.L.	B.C.	S.D.
Partition®	PT	170gr. RN	2.550"	0.252	0.256
CASE TYPE:	Winchester	PRIMER TYPE	WLR		
CASE HOLDS:	34.6 Gr. WATER	BARREL Length/Make	20" Wiseman		
		BARREL Twist	1-12"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
<b>RL15</b>	31.5 MAX. 1979		95%		
	29.5 1837		89%		
	27.5 * 1696		83%		
<b>AA 2520</b>	32.5 MAX. 1989		97%		
	30.5 * 1889		91%		
	28.5 1789		85%		
<b>Benchmark</b>	28.0 MAX. 1999		87%		
	26.0 * 1874		81%		
	24.0 1749		75%		
<b>TAC</b>	30.0 MAX. 2034		88%		
	28.0 * 1964		82%		
	26.0 1893		76%		
<b>H414</b>	37.0 * MAX. 2062		**	111%	
	35.0 1947		**	105%	
	33.0 1832			99%	
<b>W748</b>	34.0 MAX. 2066		**	102%	
	32.0 * 1949			96%	
	30.0 1832			90%	
<b>IMR 4895</b>	31.0 * MAX. 2160			97%	
	29.0 2030			91%	
	27.0 1900			85%	
<b>Varget</b>	32.5 MAX. 2163		**	102%	
	Most Accurate 30.5 1953			95%	
	Powder Tested 28.5 * 1744			89%	
<b>IMR 3031</b>	30.0 MAX. 2168			96%	
	28.0 1953			90%	
	26.0 * 1738			83%	
<b>IMR 4320</b>	33.0 MAX. 2192		**	104%	
	31.0 2017			97%	
	29.0 * 1842			91%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

\* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.\*

\* = Most accurate load tested

\*\* = Compressed load