


Cartridge

30 Nosler - 200 grain

Version 9.0

NOSLER®

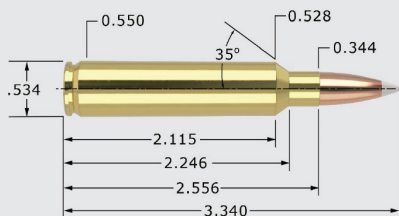

30 Nosler - 200 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		3.340"	TESTED O.A.C.L.	B.C.	S.D.
AccuBond®	AB	200gr. Spitzer	3.340"	0.588	0.301
Partition®	PT	200gr. Spitzer	3.340"	0.481	0.301
CASE TYPE:	Nosler	PRIMER TYPE	WLRM		
CASE HOLDS:	87.5 Gr. WATER	BARREL Length/Make	26" Pac-Nor		
		BARREL Twist	1-10"		
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
Norma MRP	73.0 * MAX. 2961		92%		
	71.0 2899		89%		
	69.0 2837		87%		
RL22	74.0 * MAX. 2972		92%		
	72.0 2924		89%		
	70.0 2876		87%		
IMR 7977	78.0 * MAX. 2985		96%		
	76.0 2921		93%		
	74.0 2857		91%		
IMR 7828 SSC	75.0 MAX. 2995		88%		
	Most Accurate 73.0 * 2907		86%		
	Powder Tested 71.0 2819		84%		
H1000	79.0 * MAX. 3012		96%		
	77.0 2934		93%		
	75.0 2856		91%		
RL25	78.0 * MAX. 3012		97%		
	76.0 2967		94%		
	74.0 2922		92%		
RL26	78.0 MAX. 3023		91%		
	76.0 * 2924		89%		
	74.0 2825		86%		
Magnum	84.0 MAX. 3043		97%		
	82.0 * 2965		95%		
	80.0 2887		93%		
MAGPRO	83.0 MAX. 3058		98%		
	81.0 2976		95%		
	79.0 * 2894		93%		
Retumbo	83.0 MAX. 3080		**	102%	
	81.0 * 3012			100%	
	79.0 2944			97%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load