


CARTRIDGE

30 Thompson Center - 125 grain

Version 8.0

Nosler®

UP FRONT

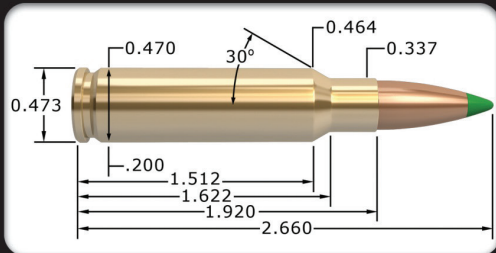

30 Thompson Center - 125 grain

30 Cal. (.308")

MAXIMUM S.A.A.M.I. O.A.C.L. 2.660"

TESTED O.A.C.L.

B.C.

S.D.

AccuBond®	125gr. Spitzer	2.640"	0.366	0.188
Ballistic Tip®	125gr. Spitzer	2.640"	0.366	0.188
CASE TYPE:	Hornady	PRIMER TYPE	Fed. 210	
CASE HOLDS:	50.0 Gr. WATER	BARREL Length/Make	24" Pac-Nor	
		BARREL Twist	1-12"	

POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)
IMR 4320 Most Accurate Powder Tested	49.0 * MAX.	3105	** 105%
	47.0	2984	** 101%
	45.0	2863	97%
RL10x	42.5 * MAX.	3135	96%
	40.5	2999	91%
	38.5	2860	87%
Benchmark	46.5 * MAX.	3187	** 101%
	44.5	3040	96%
	42.5	2897	92%
TAC	48.5 MAX.	3215	99%
	46.5	3116	95%
	44.5 *	3017	91%
A-2460	48.0 MAX.	3247	97%
	46.0	3136	93%
	44.0 *	3032	89%

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load