


Cartridge

300 BLK - 110 grain

Version 9.0

NOSLER®

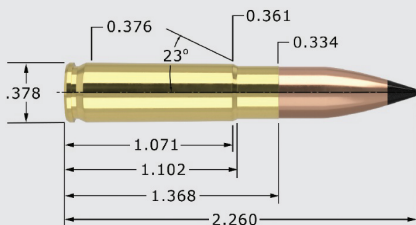

300 BLK - 110 grain

30 Cal. (.308")

MAXIMUM SAAMI O.A.C.L.		2.260"	TESTED O.A.C.L.	B.C.	S.D.
Expansion Tip®	ET	110gr. Spitzer	2.025"	0.310	0.166
Due to internal construction differences, always begin with starting loads when using Expansion Tip® products.					
Varmageddon®	VMG	110gr. FB Tipped	2.025"	0.293	0.166
CASE TYPE:	Nosler	PRIMER TYPE		WSR	
CASE HOLDS:	19.2 Gr. WATER	BARREL Length/Make		16" Pac-Nor	
		BARREL Twist		1-8"	
POWDER TYPE	POWDER CHG. GRS.	MUZZLE VEL. F.P.S.	LOAD DENSITY (VOLUME)		
IMR 4227	18.5 MAX. 2180		**	115%	
	17.5 * 2064		**	109%	
	16.5 1948		**	102%	
2400 Most Accurate Powder Tested	16.0 MAX. 2228			95%	
	15.0 * 2137			89%	
	14.0 2047			83%	
N110	17.5 MAX. 2275		**	120%	
	16.5 * 2188		**	113%	
	15.5 2101		**	106%	
Enforcer	17.5 MAX. 2285			96%	
	16.5 2200			90%	
	15.5 * 2114			85%	
W296	19.5 * MAX. 2362		**	104%	
	18.5 2311			98%	
	17.5 2260			93%	
PP 300-MP	20.5 * MAX. 2364		**	113%	
	19.5 2247		**	107%	
	18.5 2130		**	102%	
H110	19.0 MAX. 2365		**	101%	
	18.0 2277			96%	
	17.0 * 2188			90%	

All cartridge measurements are SAAMI maximum and due to variations from manufacturers actual measurements may vary

* Because Nosler, Inc. has no control over the actual components selected, the manner in which they are assembled or the condition of the firearm used, no responsibility, either expressed or implied is assumed for the use of this data.

In no event shall Nosler, Inc. be liable for any damages resulting from the use of this data.*

* = Most accurate load tested

** = Compressed load